



PFXSP5600TAD

Standard product information

Electrical specifications

Structural specifications

Display specifications

Environmental specifications

Dimensions

Standard product information

Family	HMI
Series	SP5000 Series
Size	12"
Model	PFXSP5600TAD
Global Code	PFXSP5600TAD
Product Features	12" Advanced Display

Display specifications

Display type	TFT Color LCD
Display size	12.1"
Resolution	1,024 x 768 pixels (XGA)
Auto scaling	Not equipped
Effective display area	W245.76 x H184.32 mm [W9.68 x H7.26 in.]
Display colors	262,144 colors


by Schneider Electric

Backlight service life	50,000 hrs. or more (each in continuous operation at 25 °C [77 °F] before backlight brightness decreases to 50%)
Brightness control	0 to 100 (Adjusted with touch panel or software)
Brightness sensor	Not equipped
Touch panel type	Resistive Film (analog)
Touch panel resolution	1,024 x 1,024
Touch panel lifetime	1,000,000 times or more

Electrical specifications

Rated input voltage	12 to 24 Vdc
Input voltage limits	10.8 to 28.8 Vdc
Allowable voltage drop	12 Vdc: 1.25 ms or less 24 Vdc: 5 ms or less
Power consumption	Max. 10 W Backlight adjusted (20%): 5.7 W or less Backlight OFF (Stand-by mode): 2.5 W or less ^{*1}
In-rush current	30 A or less
Noise immunity	Noise Voltage : 1,000 Vp-p Pulse Duration : 1 µs Rise Time : 1 ns (via noise simulator)
Voltage endurance	1,000 Vac, 20 mA for 1 minute (between power terminal and FG terminals)
Insulation resistance	500 Vdc, 10 MΩ or more (between power terminal and FG terminals)

^{*1} Power consumption for Display Module only

Environmental specifications

	    
Surrounding air temperature	0 to 60 °C [32 to 140 °F]
Storage temperature	-20 to +60 °C [-4 to 140 °F]
Ambient humidity	10 to 90 % RH (Wet bulb temperature: 39 °C [102.2 °F] max. - no condensation)
Storage humidity	10 to 90 % RH (Wet bulb temperature: 39 °C [102.2 °F] max. - no condensation)
Dust	0.1 mg/m ³ (10 ⁻⁷ oz/ft ³) or less (non-conductive levels)
Pollution degree	For use in Pollution Degree 2 environment
Corrosive gases	Free of corrosive gases
Air pressure (altitude range)	800 to 1,114 hPa (2,000 m [6,561 ft.] above sea level or less)
Vibration resistance	IEC/EN 61131-2 compliant 5 to 9 Hz single amplitude 3.5 mm [0.14 in.] 9 to 150 Hz fixed acceleration: 9.8 m/s ² X, Y, Z directions for 10 cycles (approx. 100 min.)
Concussion resistance	IEC/EN 61131-2 compliant 147 m/s ² , X, Y, Z directions for 3 times
Electrostatic discharge immunity	Contact Discharge Method: 6 kV Air Discharge Method: 8 kV (IEC/EN61000-4-2 Level 3)

Structural specifications

Grounding	Functional grounding: Grounding resistance of 100 Ω, 2 mm ² (AWG 14) or thicker wire, or your country's applicable standard (same for FG and SG terminals).
Cooling method	Natural air circulation
Structure	IP66F, IP67F, Type 1, Type 4X (indoor use only)/13 ^{*1}
External dimensions	W315 x H241 x D67 mm [W12.4 x H9.49 x D2.64 in.]




by Schneider Electric


weight	5.2 kg [11.1 lb] or less
--------	--------------------------

- *1 The front face of the unit, installed in a solid panel, has been tested using conditions equivalent to the standards shown in the specification. Even though the unit's level of resistance is equivalent to these standards, oils that should have no effect on the unit can possibly harm the unit. This can occur in areas where either vaporized oils are present, or where low viscosity cutting oils are allowed to adhere to the unit for long periods of time. If the unit's front face protection sheet becomes peeled off, these conditions can lead to the ingress of oil into the unit and separate protection measures are suggested. Also, if non-approved oils are present, it may cause deformation or corrosion of the front panel's plastic cover. Therefore, prior to installing the unit, be sure to confirm the type of conditions that will be present in the unit's operating environment. If the installation gasket is used for a long period of time, or if the unit and its gasket are removed from the panel, the original level of the protection cannot be guaranteed. To maintain the original protection level, be sure to replace the installation gasket regularly.
- *2 For dimensional tolerance, everything +1/-0 mm [+0.04/-0 in.] and R in angle are below R3 [R0.12 in.]. Even if the installation wall thickness is within the recommended range for the "Panel Cut Dimensions", depending on wall's material, size, and installation location of GP unit and other devices, the installation wall could warp. To prevent warping, the installation surface may need to be strengthened.
- *3 Display module only.

Dimensions	
External dimensions	<div>Display module and box module combination</div> <div><div><div>mm</div><div>in.</div></div><div>(3)</div><div><div>315</div><div>12.40</div></div><div><div>241</div><div>9.49</div></div><div>(1)</div><div><div>67</div><div>2.64</div></div><div><div>6.7</div><div>0.26</div></div><div>(2)</div></div> <div><div>1 Front</div><div>2 Left</div><div>3 Bottom</div></div>

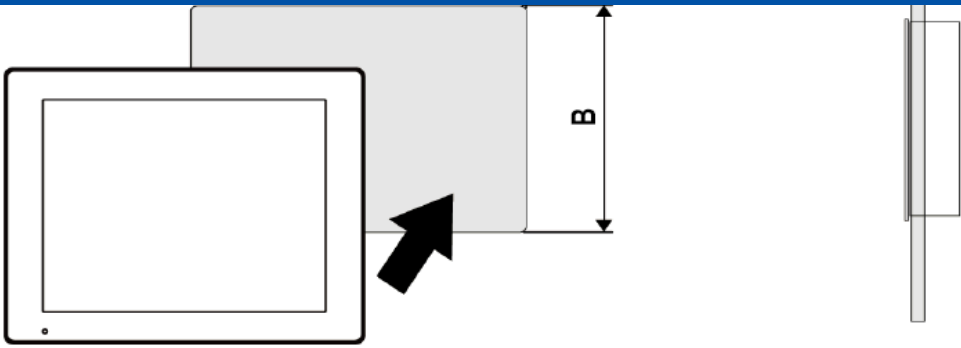

A	B	C
301.5 (+1/-0) mm [11.87 (+0.04/-0)] in.	227.5 (+1/-0) mm [8.96 (+0.04/-0)] in.	1.6 to 5 mm [0.06 to 0.2] in.

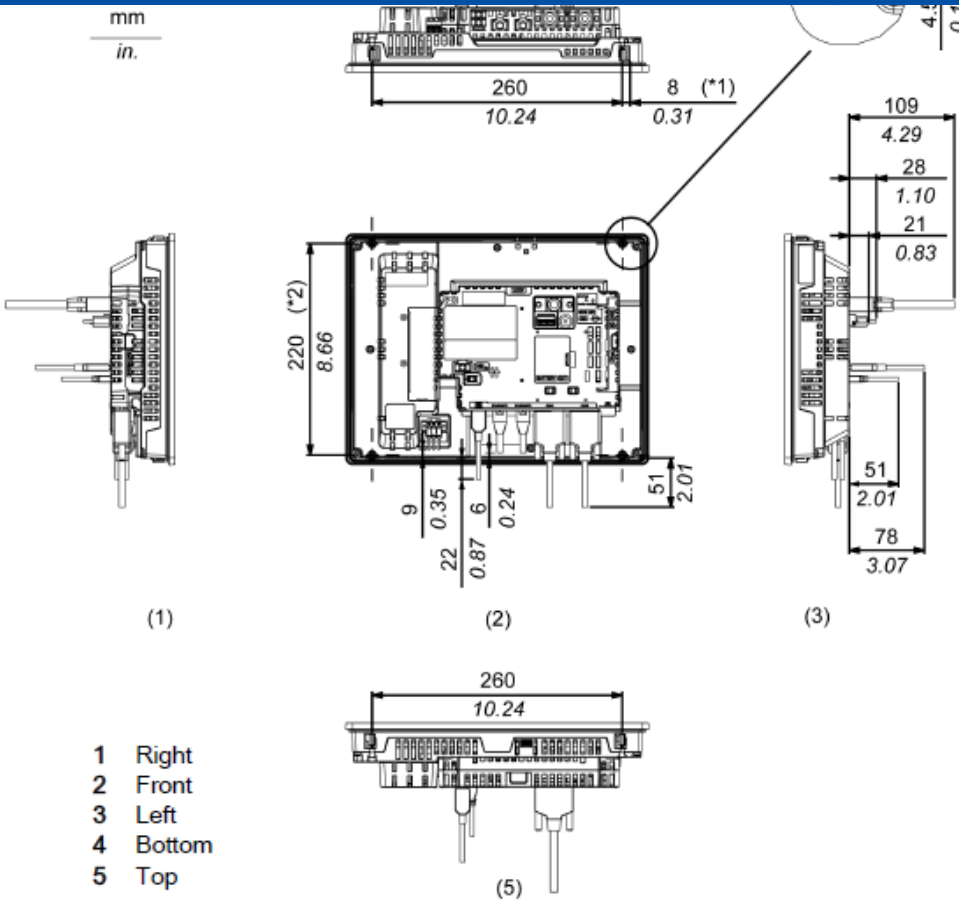

(Image of Open Box)

*1 Rotation area of the fastener

*2 Pitch of center of installation fastener screws

[Privacy Policy](#)

[CA-125](#)

[Change your cookie settings](#)

Products

[Selection Guide](#)
[Edge Box](#)
[Industrial PC\(IPC\)](#)
[Advanced HMI](#)
[Basic HMI](#)

Solution

[About HMI Centric](#)
[HMI Centric Architecture](#)
[Success Story](#)
[Industry Segment Solution](#)
[Solution Search](#)

HMI Design Studio

[Concept Introduction](#)
[BLUE](#)
[BLUE Open Studio](#)
[GP-Pro EX](#)

Support

About Pro-face

[Pro-face Brand](#)
[Overview & History](#)
[Brand Initiatives](#)

News

[News](#)



Worldwide



Sign In / Register



by **Schneider** Electric

Disft-continued Products &

Substitutes

Customization and

Services

Email*

I am a*

Select a value

▼

Submit

I'd like to receive news and commercial info from Schneider Electric and its affiliates via electronic communication means such as email, and I agree to the collection of information on the opening and clicks on these emails (using invisible pixels in the images), to measure performance of our communications and improve them. For more details, please read our [Privacy Policy](#).

